



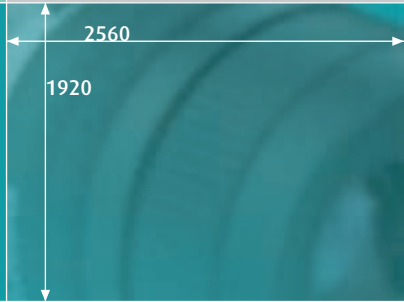

**iDS**

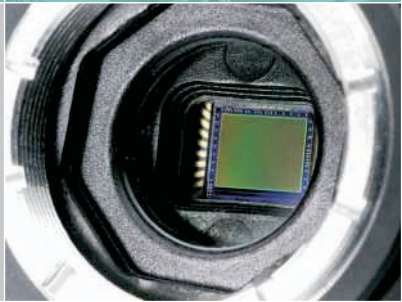

**Gigabit Ethernet uEye<sup>®</sup> UI-5480-C**


**5 Mega pixels QSXGA Camera with 1/2" CMOS Sensor**

# Gigabit Ethernet uEye® UI-5480-C




## The Gigabit Ethernet uEye® family

The Gigabit Ethernet uEye® extends the broad range of USB cameras by powerful models for sophisticated, complex machine vision and image processing applications. The bandwidth is 2.5 times higher than with USB and cable lengths up to 100 m are possible.



Sensor characteristics


UI-5480-C

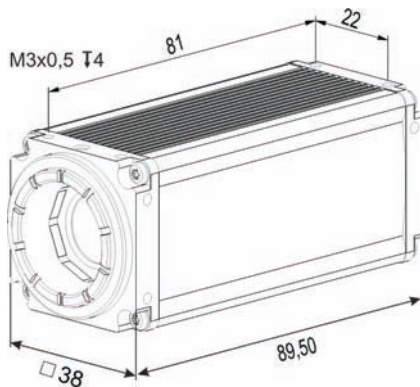

Dimensions of the Gigabit Ethernet uEye® models

### Pin assignment MDR14 Multi I/O connector

Pin Notation	Description
1	GND
2	VCC
3	TriggerGND
4	TriggerIN
5	FlashOut
6	Vext
7	GND
8	GND
9	VCC
10	GPIO1
11	GPIO2
12	RxD
13	TxD
14	GND



Power supply: 6 - 24V (12V recommended)

Connectors of the Gigabit Ethernet uEye® models

## The characteristics at a glance

Interface	Gigabit Ethernet
Sensor Technology	CMOS
Model description (color)	UI-5480-C
Model description (Mono)	-
Resolution (h x v)	2560 x 1920
Resolution Category / Pixel Class	Q SXGA/5 MP
Sensor size	1/2"
Shutter	Rolling/Global Start
max. fps in Freerun Mode at full resolution	12 fps
max. fps in SW Trigger Mode at 1 ms exposure	11 fps
Exposuretime in Freerun Mode	37 µs - 2,7 s
Exposuretime in Trigger Mode	37 µs - 2,7 s
AOI Modes	H <sup>2</sup> + V <sup>2</sup>
AOI with 320 x 240 Pixels (CIF)	100 fps
Subsampling Modes	H <sup>2</sup> + V <sup>2</sup>
Subsampling Factors	x2, x4
Resolution, fps	1280 x 960, 37 fps 640 x 480, 103 fps
Binning Modes	H <sup>2</sup> + V <sup>2</sup>
Binning Method	H: Sum V: Average
Binning Factors	x2, x4
Resolution, fps	1280 x 960, 29 fps 640 x 480, 45 fps
Mono: Maximum Gain	-
Color: Maximum Gain RGB/Master	6,5x/12x
Additional Gain Boost with Factor	1,6x
Sensor Model	MT9P031
Pixel Clock	5 - 82 MHz
Pixelpitch in µm	2,2
Full Well Capacity	15.000 e-
Optical Size	5,63 x 4,22 mm
Aspect Ratio	4:3
Exact Real Diagonal	7,0 mm, 1/2,3"

### In scope of delivery:

Powerful, easy to handle uEye SDK  
uEye Demo and Programexamples  
executable and Source Code.  
uEye Camera Manager  
TWIN, Active-X and Direct Show  
(WDM) drivers  
Interfaces for Activision Tools,  
Common Vision Blox, HALCON,  
LabVIEW and Neurocheck  
GenICam™ Interface\*

<sup>2</sup> = Use increases frame rate  
\* = in preparation (end of 2007)

Driver for Windows 2000\*, XP, VISTA\*  
and Linux\*

